

## 3240nm Single frequency DFB Laser



### Description:

The LD-PD's Distributed Feedback Lasers (DFB) are specifically designed for high-precision gas detection using tunable diode laser absorption spectroscopy (TDLAS). Our devices operate reliably in more than 40,000 installations worldwide. For more than 10 years LD-PD has set the standard for DFB laser technology and we manufacturer routinely providing DFB lasers at any wavelength.

### Features:

- Mono mode, Continuous Wave
- Room Temperature operation
- Mode hop free tuning

### Application:

- TDLAS
- Data Communication
- MIR Testing

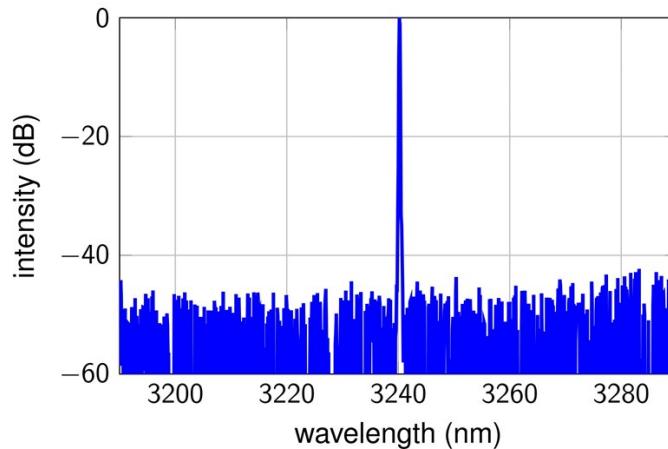
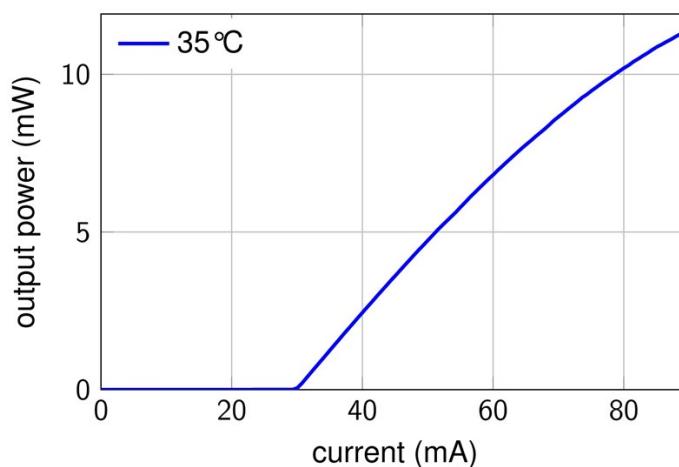
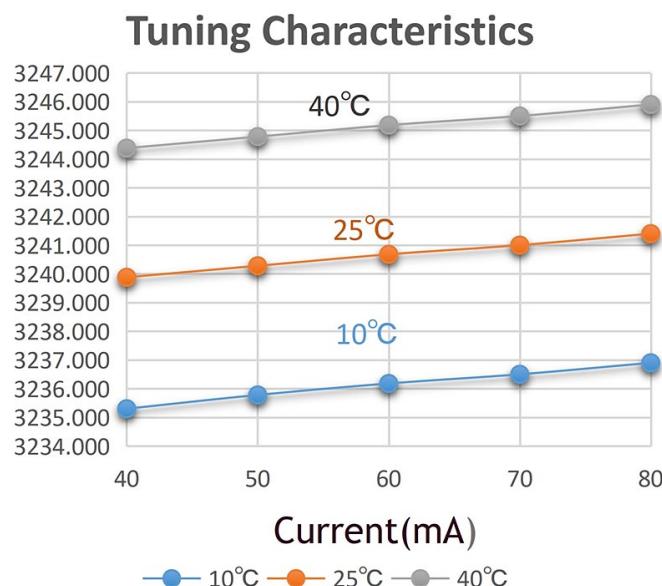
**Electrical/Optical Characteristics:**T<sub>sub</sub>=25°C, CW bias unless stated otherwise

parameters	symbol	unit	minimum	typical	maximum
operating wavelength (at Top, l <sub>op</sub> )	λ <sub>op</sub>	nm		3240nm	
optical output power (at op)	P <sub>op</sub>	mW		10	
operating current	I <sub>op</sub>	mA		120	
operating voltage	V <sub>op</sub>	V		5	
threshold current	I <sub>th</sub>	mA	15	30	50
side mode suppression ratio	SMSR	dB		> 35	
current tuning coefficient	C <sub>I</sub>	nm / mA		0.10	
temperature tuning coefficient	C <sub>T</sub>	nm / K		0.35	
operating chip temperature	T <sub>op</sub>	°C	+10	+20	+50
operating case temperature*	T <sub>C</sub>	°C	-20	+25	+50
storage temperature*	T <sub>S</sub>	°C	-30	+20	+70

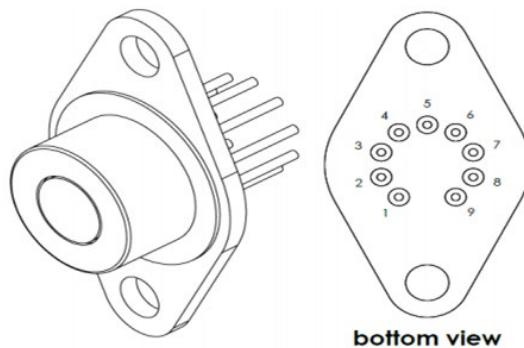
**TEC parameters:**

Parameter	Symbol	Value	Unit
Max. temp. diff. (@ Q=0 W)	ΔT <sub>max</sub>	65	K
Max. current	max	1.4	A
Max. voltage	max	3.8	V
Max. power (@ ΔT = 0K)	max	3	W
Thermistor R <sub>0</sub> @ 25 °C	R <sub>0</sub>	10000	Ω
Thermistor Beta	B	3930	

Headquarters:288,Woolands Loop, #04-00,Singapore 738100

**Spectrum:****Power vs Current:****Tuning Characteristics:**

## Outline Drawing:



Pin	Function	Pin	Function
1	TEC (+)	6	n/c
2	Thermistor	7	LD (+)
3	Thermistor	8	LD (-)
4	n/c	9	TEC (-)
5	n/c		

## Absolute maximum ratings:

Parameter	Symbol	Unit	min	typical	max
Operation Voltage	U	V			3.9
Max. Current	I <sub>max</sub>	mA			80
Threshold Current	I <sub>th</sub>	mA		19	
Slope Ef Ciency	e	mW/mA		0.352	

Parameter	Symbol	Unit	min	typical	max
Wavelength	λ	nm		3240	
Operation Temperature	T	°C	20	20	25
Operation Current	I	mA		44	
Output Power	P <sub>opt</sub>	mW		8.6	

Note:

Caution: Before operating the TEC, the housing must be connected to a suitable heatsink

Note: The cap is no heatsink and not suited to be used as contact with a heatsink. Only use the bottom of the base plate for this purpose.

Note: The cap must not be used as base for any fixtures as e.g. collimation.

**Ordering Info:**

TDLAS-DFB-□□□□ -☆-A8▽

□□□□: Wavelength

3000: 3000nm

3240: 3240nm

\*\*\*\*\*

4000: 4000nm

☆: Output Power

A: 5mW

B: 10mW

▽: Wavelength Tolerance

1: ±1nm

2: ±2nm