


633nm Single frequency FBG stabilized Tunable Laser Diodes

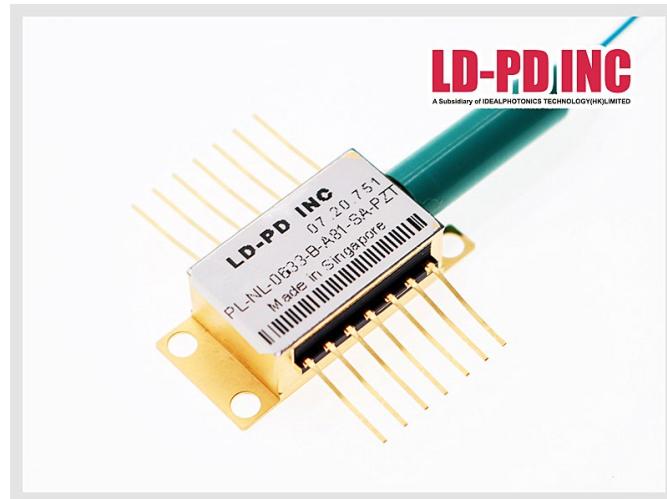

Description:

The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). The Single-Frequency Continuous Tuning Range: > 1.2 nm by adjust the Mini PZT Built in the laser diode.

Features:

- Optical output: 20mW
- Narrow linewidth ($\Delta\nu < 1\text{MHz}$)
- Wavelength: 633nm @ 25°C
- SM or PM Fiber ($\phi 0.9\text{mm}$)
- FC-APC connector
- 14-pin butterfly package
- Internal monitor PD and TEC
- Low power consumption

Application:

- Laser interference experiment
- Optical Test and Instrumentation
- Sensors

Laser Specifications:

Optical Characteristics (at 25 °C laser temperature)


Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Center Wavelength	λ_c	TL=15~35°C CW	631.5	632.5	633	nm
Peak Optical Output Power	P _O	-	10	-	30	mW
Spectral linewidth	L _W	-	-	1	10	MHZ
Relative Intensity Noise	R _{IN}			-145		db/HZ
SMSR	SMSR	CW	40	50	-	dB
PER	ER	-	20	-	-	dB
Wavelength drift with case (-10 to 70 °C) temperature	$\Delta\lambda$	TL=15~35°C	-	-	± 1	pm
Wavelength Temperature coefficient	$\Delta\lambda/\Delta T$	TL=15~35°C	-	80		pm/°C
Wavelength Current coefficient	$\Delta\lambda/\Delta I$	-	-	1		pm/mA
Tuning Range(For PZT Version)	Δf		0.5		1	nm
PZT Driving Voltage(PZT Version)	V _T		0		150	V
Mode Hop free Range	ΔI			30		mA

Electrical Characteristics (at 25 °C laser temperature)


Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Threshold Current	I _{TH}	-	-	45	65	mA
Slope Efficiency	η	CW , 10 mW	0.064	0.1	-	mW/mA
Operating current	I _{op}	CW	-	150	200	mA
TEC set temperature	T _s	-	15	-	35	°C
Laser Forward Voltage	V _F	CW output power 5 mW	-	1.3	1.8	V
Monitor Dark Current	I _D	-	-	-	0.1	μA
Cooler Voltage	V _c	IF=EOL , TC=70°C			2.7	V
Cooler Current	I _c	IF=EOL , TC=70°C	-	-	1.4	A
Thermistor Resistance	R _{TH}	TL = 25 °C	9.5	10	10.5	KΩ
TEC Current	I _{TEC}	TL = 25 °C, TC = 70 °C	-	-	1.8	A
TEC Voltage	V _{TEC}	TL = 25 °C, TC = 70 °C	-	-	3.5	V
Tuning Range	Δf		1		1.5	nm
PZT Tuning Voltage	V _T		0		150	V
Mode Hop Free Range	ΔI			30		mA
Extinction Ratio	X _P	CW 10 mW	17			dB
TEC capacity	ΔT	T _c = 70°C	-	-	50	°C
Thermistor temperature	-	-	-	-	100	°C

Headquarters:288,Woolands Loop, #04-00,Singapore 738100


Spectrum:

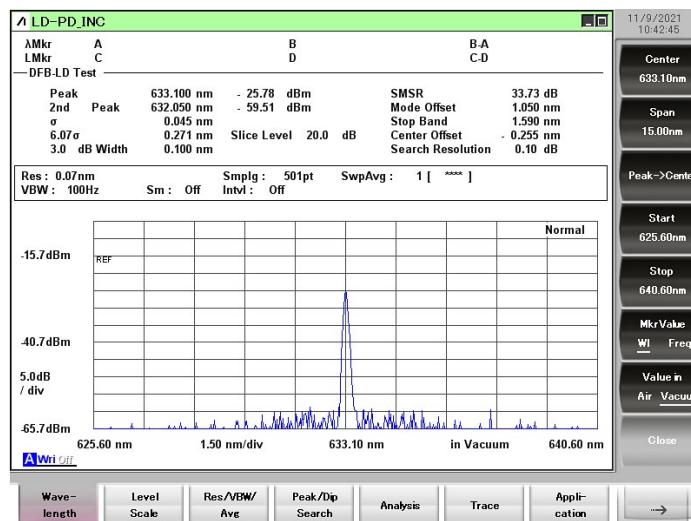

Voltage Vs Wavelength(PZT Version):

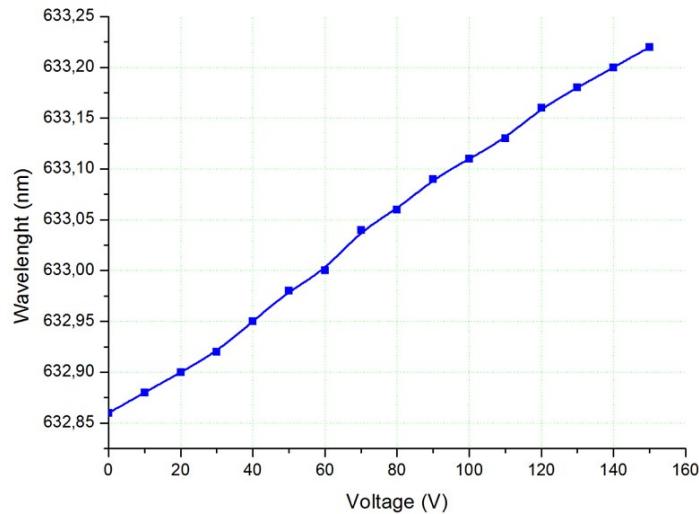


L-I Curve:

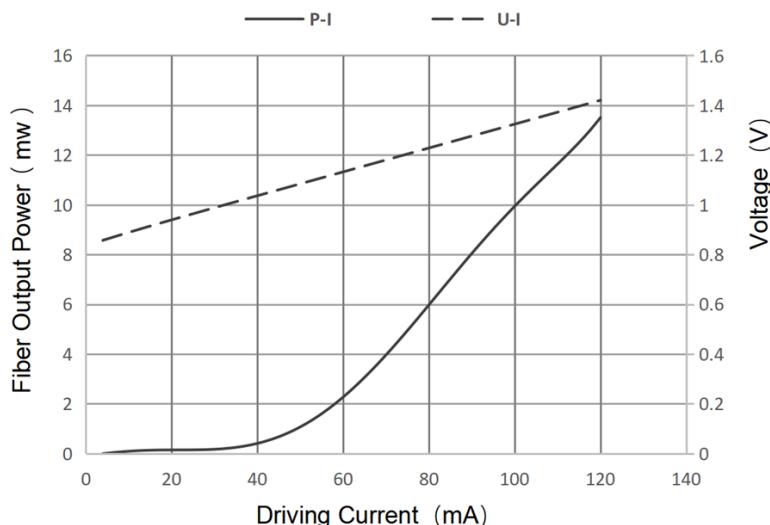


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100


Linewidth Testing Result

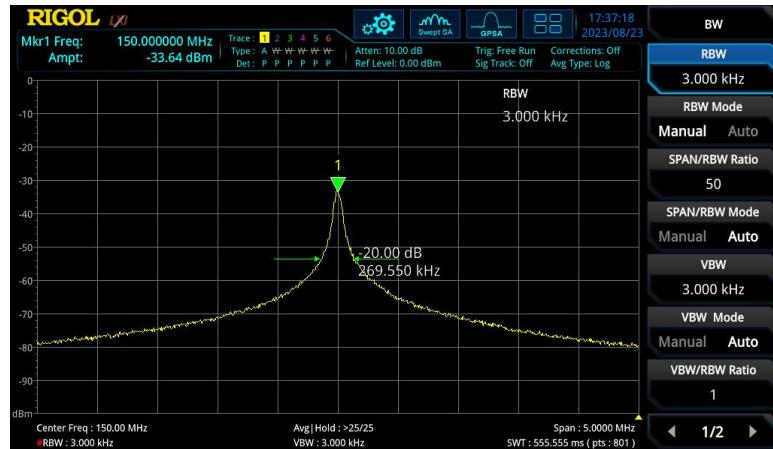



Central Wavelength:

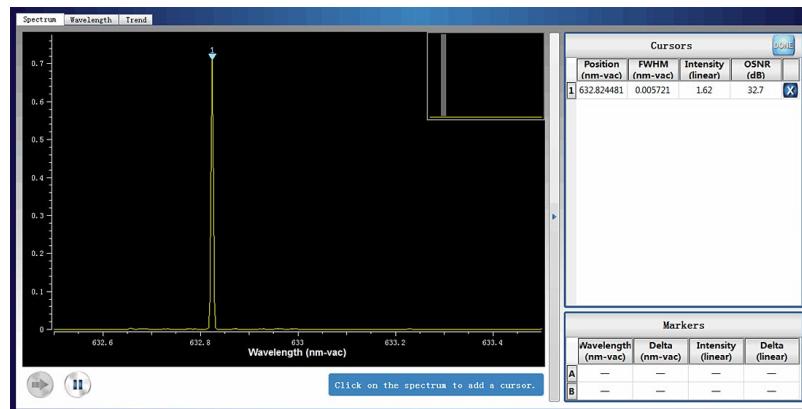

Wavelength Stability:

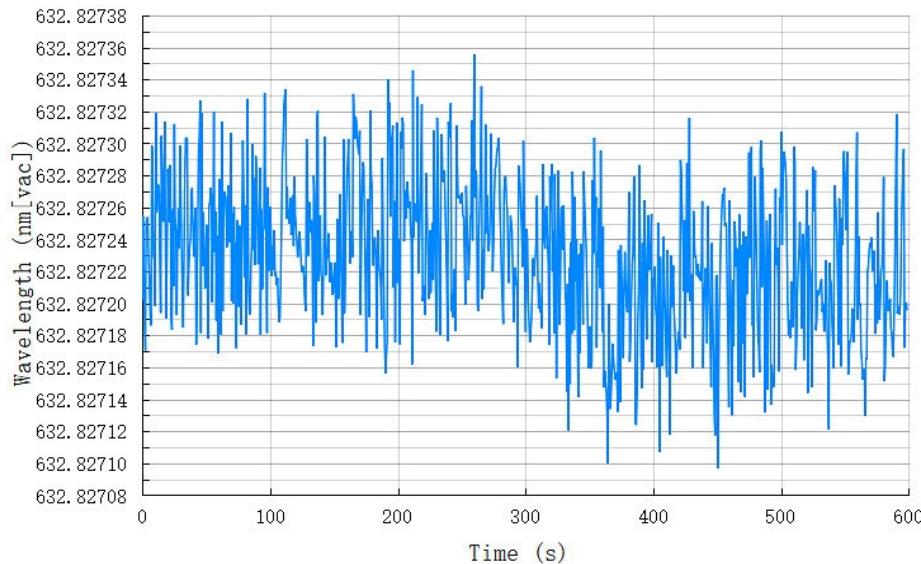


Beam Quality(M2,2D/3D Beam):

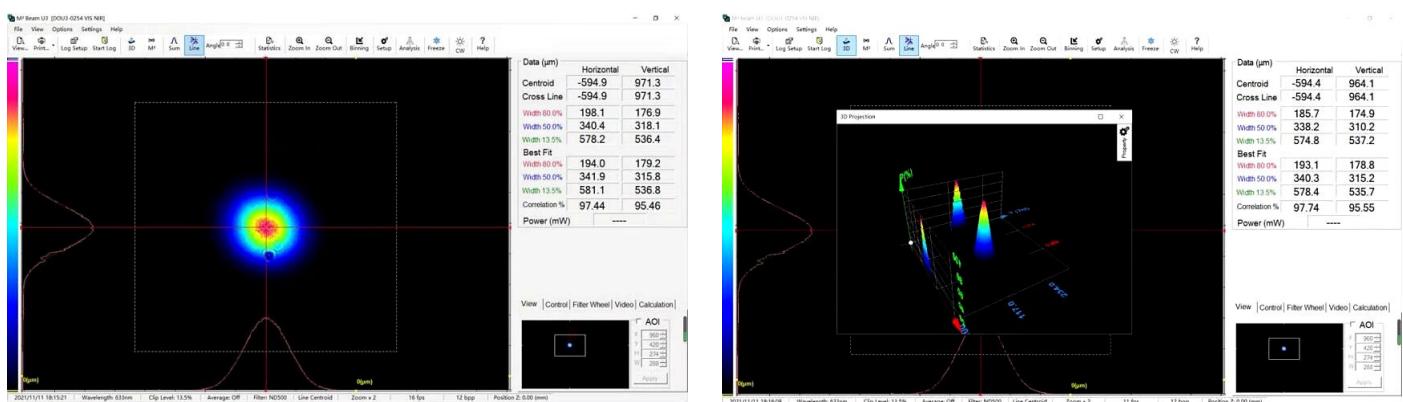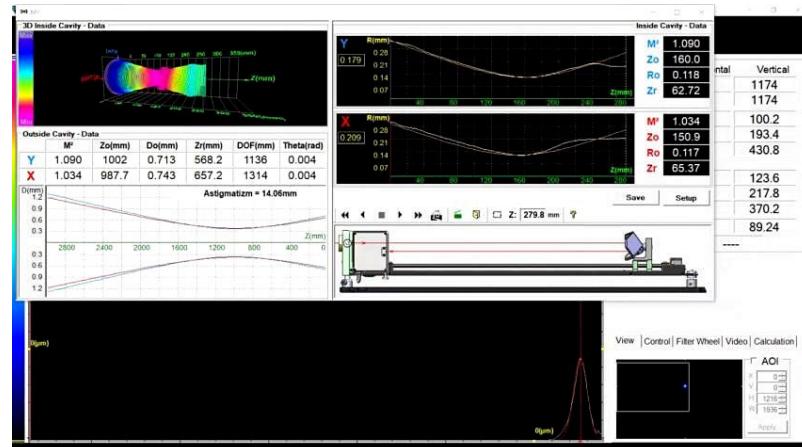


Fiber Pigtail Specifications:

Parameters	Description
Fiber Type	SM600/PM630 fiber
Jacket Type	900μm loose tube
Pigtail Length	1.0±0.1m
Connector Type	FC/APC
PM fiber Connector Orientation	Please see the right figure

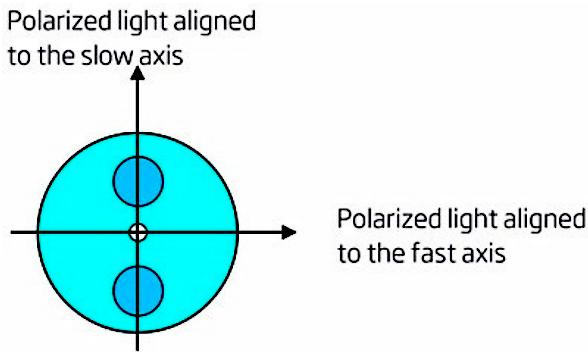


Note: The PM fiber and the connector key are aligned to the slow axis, fast axis is blocked.

Package Size:

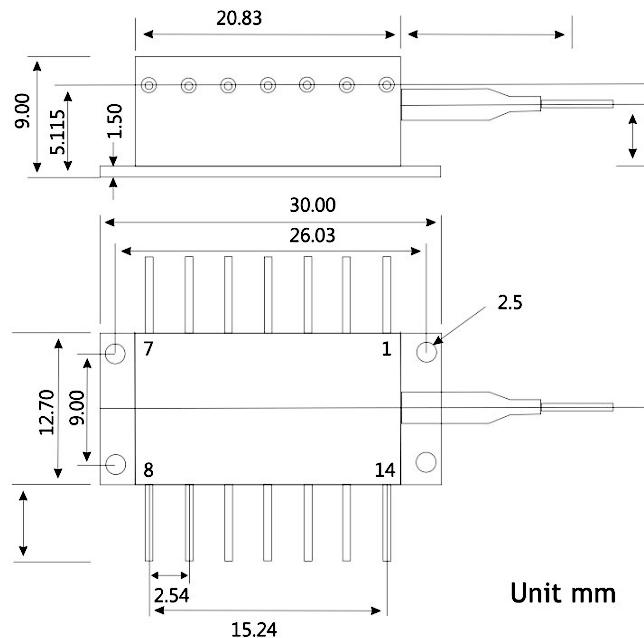

Pin definition:

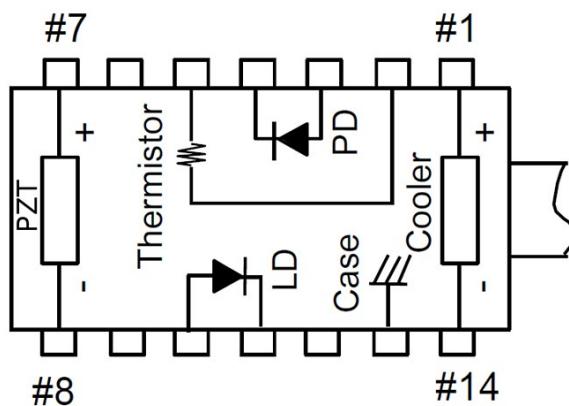

PZT Built Inside:

1	Thermoelectric Cooler (+)	8	PZT tuning -
2	Thermistor	9	N/C
3	PD Monitor Anode (-)	10	laser Anode (+)
4	PD Monitor Cathode (+)	11	Laser Cathode (-)
5	Thermistor	12	N/C
6	N/C	13	Case Ground
7	PZT tuning +	14	Thermoelectric Cooler (-)

Absolute Maximum Ratings:

Item	Unit	Min	Typ	Max
Case Temperature	°C	-40	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	150	170
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	1.2	1.4
Reverse Voltage (LD)	V	-	-	1.8

OEM Info:

PL-NL-□□□□- A8▽-XX-PZT

□□□□: Wavelength

0633: 633nm

1550: 1550nm

1555: 1555nm

1560: 1560nm

: Output Power

A: 10mW

B: 20mW

▽: Linewidth

1: <10MHZ

XX: Fiber and Connector Type

SA=SM600+ FC/APC

SP=SM600+ FC/PC

PP=PM630 Fiber+ FC/PC

PA=PM 630 Fiber+ FC/APC

No PZT: Leave it Blank

PZT: Version please use PZT to replace