

# 785nm single frequency Narrow Linewidth Laser Diode



## Description:

The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC).

## Features:

- Optical output: 20mW
- Narrow linewidth ( $\Delta\nu < 0.1\text{MHz}$ )
- Wavelength: 785nm @ 25°C
- SM or PM Fiber ( $\phi 0.9\text{mm}$ )
- FC-APC connector
- 14-pin butterfly package
- Internal monitor PD and TEC
- Low power consumption

## Optional:

- Laser interference experiment
- Drop-side of DWDM long-haul transport equipment
- Optical Test and Instrumentation
- Microwave Photonics
- CATV networks
- Sensors

## E/O Characteristics:

### Optical Characteristics (at 25°C laser temperature)


Parameter	Symbol	Condition	Min	Typical	Max	Unit
Centre Wavelength	$\lambda_c$	TL=15~35°C CW	785	790	795	nm
Peak Optical Output Power	PO	-		10	20	mW
Spectral linewidth	LW	-	-	75	100	KHz
Side-mode Suppression Ratio	SMSR	CW	30	40	-	dB
Optical Isolation	-	-10 < TC < +70°C	30	-	-	dB
Polarization Extinction Ratio	ER	-	20	-	-	dB
Relative Intensity Noise	RIN	CW, output power 5mW	-	-	-135	dB
Wavelength drift with case (-10 to 70°C) temperature	$\Delta\lambda$	TL=15~35°C	-	-	$\pm 30$	pm
Wavelength Temperature coefficient	$\Delta\lambda/\Delta T$	TL=15~35°C	-	65	80	pm/°C
Wavelength Current coefficient	$\Delta\lambda/\Delta I$	-	-	1.0	2	pm/mA

### Electrical Characteristics (at 25°C laser temperature)

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Threshold Current	ITH	-	-	25	40	mA
Slope Efficiency	$\eta$	CW output power 30 mW	0.064	0.1	-	mW/mA
Operating current	Iop	CW	-	250	300	mA
TEC set temperature	Ts	-	15	-	35	°C
Laser Forward Voltage	VF	CW output power 30 mW	-	1.3	2.5	V
Monitor Dark Current	ID	-	-	-	0.1	µA
Input Impedance	ZIN	-	22	25	28	Ω
Thermistor Current	ITC	-	10	-	100	µA
Thermistor Resistance	RTH	TL = 25°C	9.5	10	10.5	KΩ
TEC Current	ITEC	TL = 25 °C, TC = 70°C	-	-	1.8	A
TEC Voltage	VTEC	TL = 25°C, TC = 70°C	-	-	3.5	V
TEC capacity	$\Delta T$	Tc = 70°C	-	-	50	°C
Thermistor temperature	-	-	-	-	100	°C

## Fiber Pigtail Specifications:

Parameters	Description
Fiber Type	PM fiber
Jacket Type	900µm loose tube
Pigtal Length	1.0±0.1m
Connector Type	FC/APC
PM fiber Connector Orientation	Please see the right figure

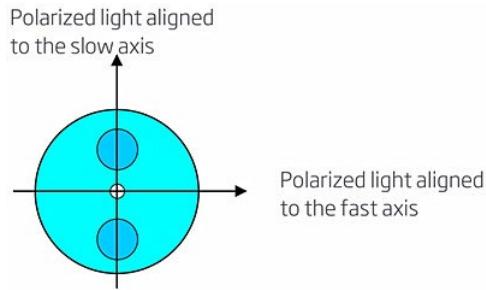




Note: The PM fiber and the connector key are aligned to the slow axis, fast axis is blocked.

## Spectrum:



## L-I Curve:

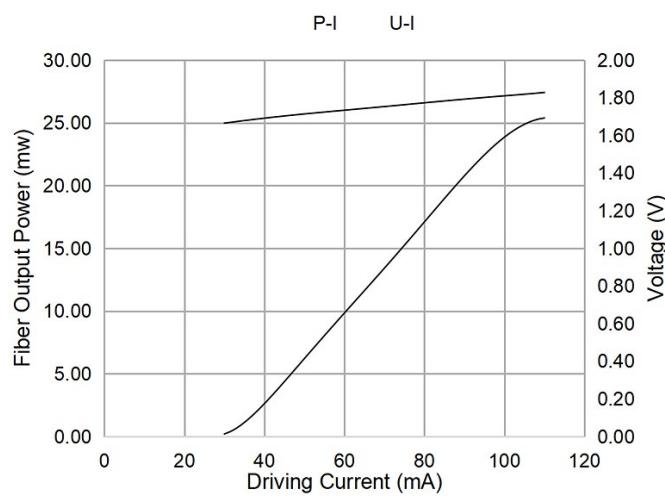

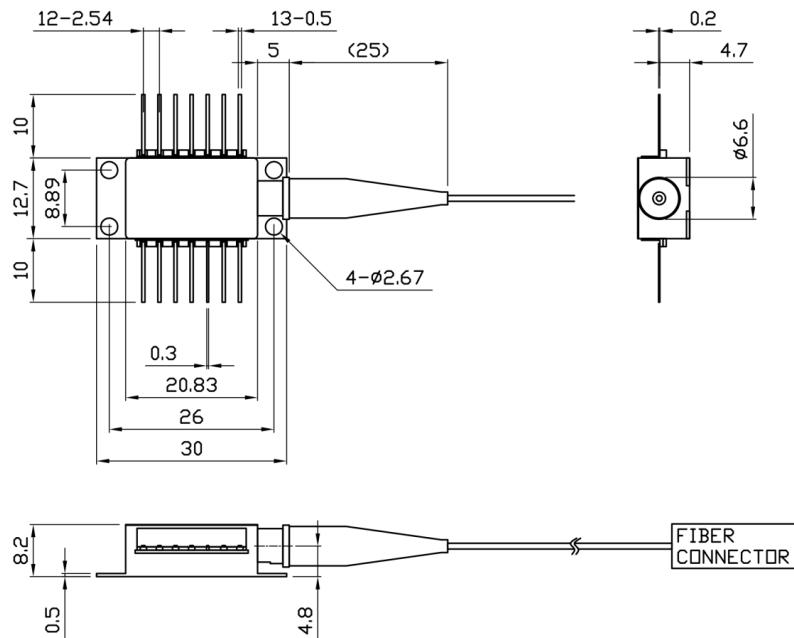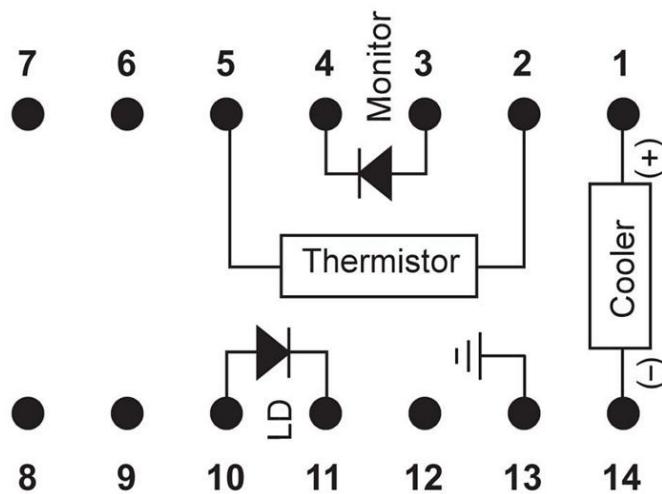**Package Size:****Pin definition:****None PZT Built inside:**

1	Thermoelectric Cooler (+)	8	N/C
2	Thermistor	9	N/C
3	PD Monitor Anode (-)	10	Laser Anode (+)
4	PD Monitor Cathode (+)	11	Laser Cathode (-)
5	Thermistor	12	N/C
6	N/C	13	Case Ground
7	N/C	14	Thermoelectric Cooler (-)

**Absolute Maximum Ratings:**

Item	Unit	Min	Typ	Max
Case Temperature	°C	-5	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	250	300
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	1.2	1.4
Reverse Voltage (LD)	V	-	-	1.8

**OEM Info:**

PL-NL-□□□□-☆-A8▽-XX

□□□□:Wavelength

0633: 633nm

0785: 785nm

0790: 790nm

0795: 795nm

1050: 1050nm

1550: 1550nm

1555: 1555nm

\*\*\*\*\*

1560: 1560nm

☆ :Output Power

A:10mW

B:30mW

▽:Linewidth

1:&lt;10MHz

XX: Fiber and Connector Type

SA=SMF-28E+ FC/APC

SP=SMF-28E+ FC/PC

PP=PM Fiber+ FC/PC

PA=PM Fiber+ FC/APC